




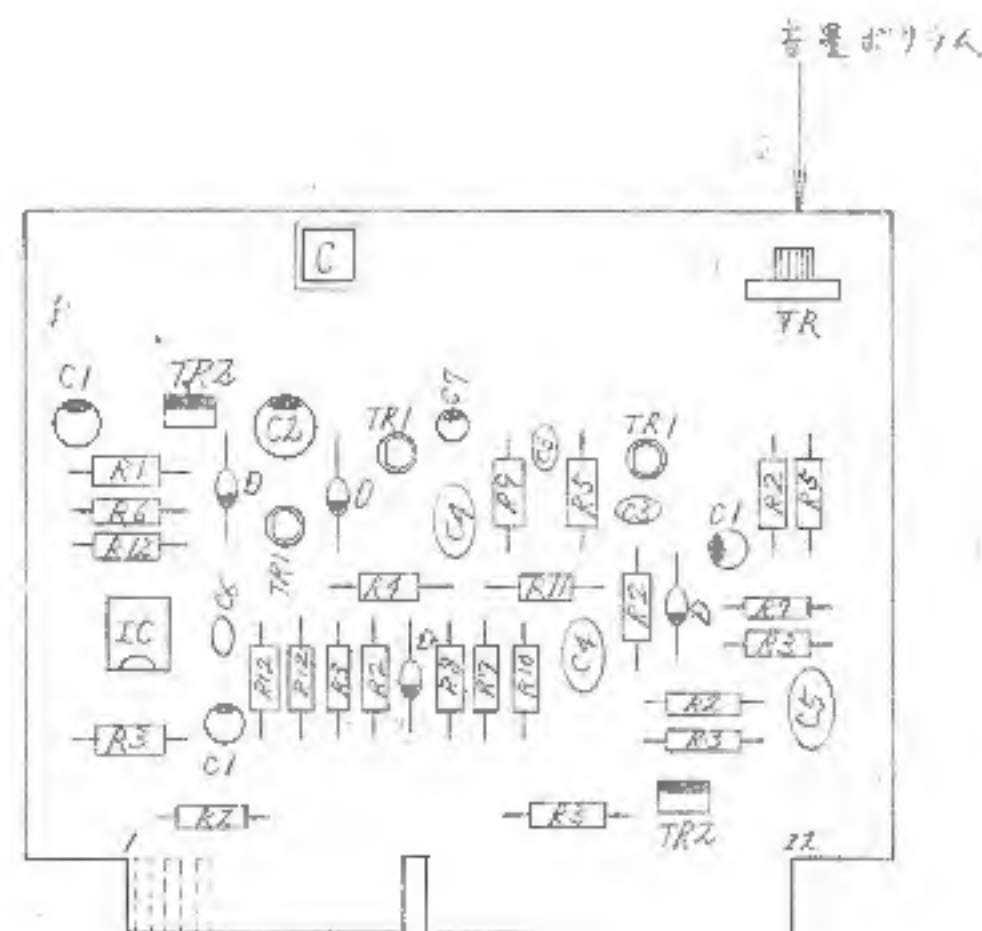


注トランジスタ (TR1, TR2) 取付方法

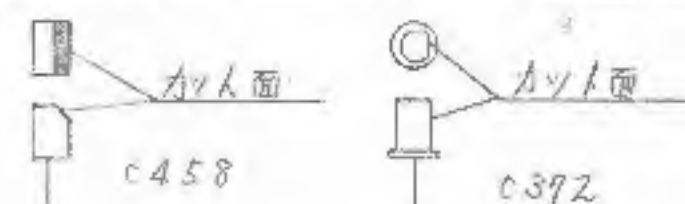

注ダイオード (D) 取付方法



注コンデンサ (-) 表示

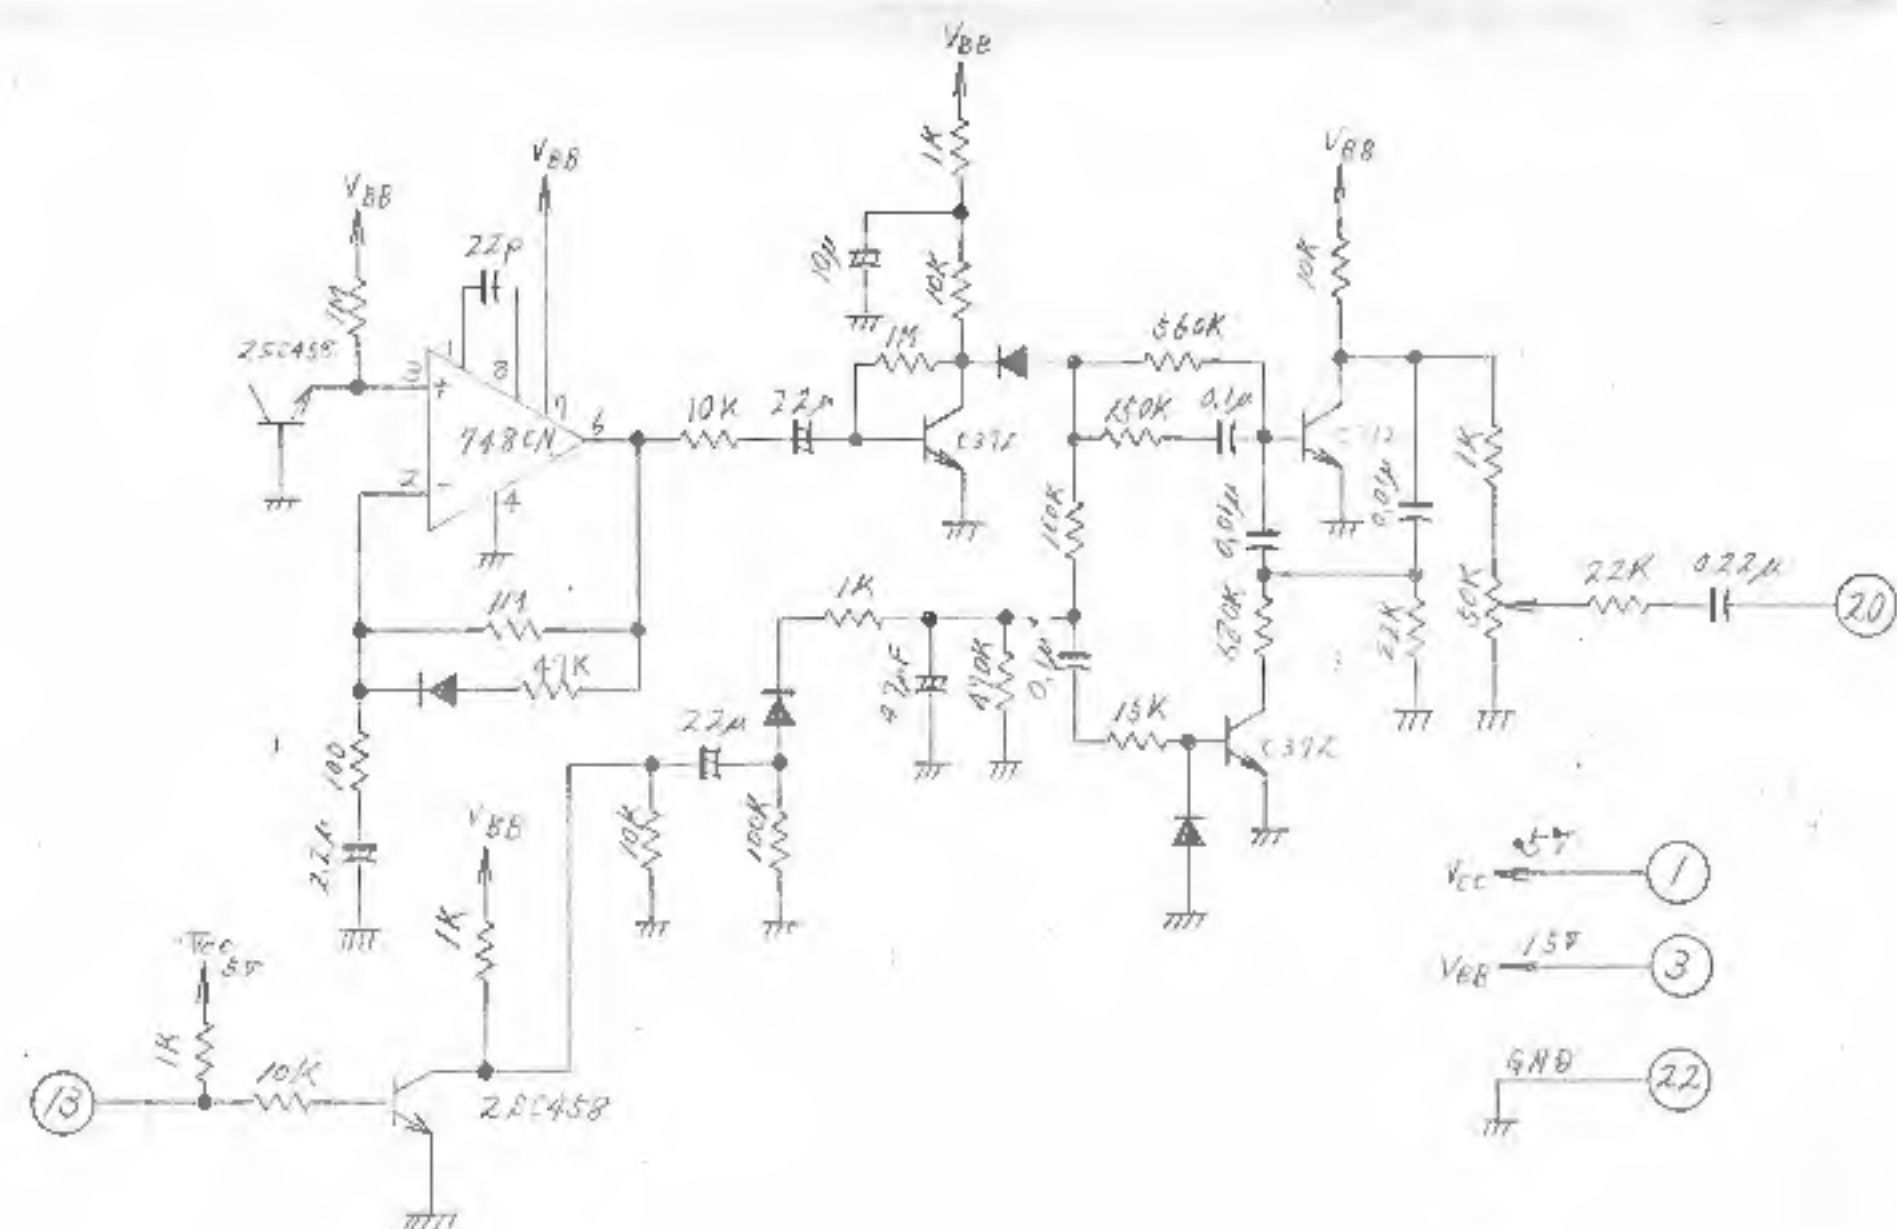

26	AAT 53041	ボリタム	TR	1	B-50KΩ
25	AAT 51839	カソード	R12	3	1MΩ ±5%
24	AAT 51833	?	R11	1	680KΩ ±5%
23	AAT 51831	?	R10	1	560KΩ ±5%
22	AAT 51829	?	R9	1	470KΩ ±5%
21	AAT 51817	?	R8	1	150KΩ ±5%
20	AAT 51813	?	R7	2	100KΩ ±5%
19	AAT 51805	?	R6	1	47KΩ ±5%
18	AAT 51797	?	R5	2	22KΩ ±5%
17	AAT 51793	?	R4	3	15KΩ ±5%
16	AAT 51789	?	R3	5	10KΩ ±5%
15	AAT 51785	?	R2	5	1KΩ ±5%
14	AAT 51741	カソード	R1	1	100Ω ±5%
13	AAT 41439	748CN	C7	1	560KΩ ±5%
12	AAT 41302	748CN	C6	1	220P ±5%
11	AAT 41246	748CN	C5	1	100P ±5%
10	AAT 41244	?	C4	2	100P ±5%
9	AAT 41238	748CN	C3	2	100P ±5%
8	AAT 41052	748CN	C2	1	50P ±5%
7	AAT 41049	748CN	C1	3	50P ±5%
6	AAT 51021	748CN	IC	1	748CN
5	AAT 12017	748CN	D	4	1S2005K
4	AAT 11005	748CN	TR2	2	2SC458-C
3	AAT 11043	748CN	TR1	3	2SC392-Y
2	AAT 17620	748CN	?	1	C
1	SA070004	748CN	?	1	?

出図
53.7.27
技術部

日付	記	事	名	仕	日	52.5.31	R
				上			
				承			
				検			
				計			
				図			
				製			
				作			
				組			
				立			